



NATURAL GAS


NEW *NG-MicroPleat* COALESCING FILTER ELEMENTS

Natural gas coalescing filters have been employed for more than 40 years in both on-shore and off-shore applications to remove unwanted particulate and aerosols from entering process systems. Fox Filtration offers both the standard technology as well as a new high performance *NG-MicroPleat* element. Our new element can significantly improve gas quality using existing vessels.

FEATURE	STANDARD TECHNOLOGY	<i>NG-MicroPleat</i> TECHNOLOGY	ADVANTAGE
SIZE	4.5 OD X 36" L	4.5 OD X 36" L	N/A
MICRON	1.0 um	0.3 um	MORE AEROSOL REMOVAL 3 ORDERS OF MAGNITUDE
FLOW RATE @ 100 PSIG	1500 CU/FT/MIN	2000 CU/FT/MIN	MORE FLOW / LOWER PRESSURE DROP
SURFACE AREA (SQ/FT)	3.9	14.0	350% MORE DIRT HOLDING
TECHNOLOGY	FIBERGLASS / PHENOLIC IMPREGNATED TUBE	PROPRIETARY MICRO- FIBERGLASS, PLEATED	IMPROVED FILTRATION PERFORMANCE

MORE DIRT HOLDING CAPACITY — LONGER SERVICE LIFE
MORE FLOW — LESS RESTRICTION
BETTER QUALITY GAS — LESS LIQUID / LESS DIRT

Upgrade current system performance:

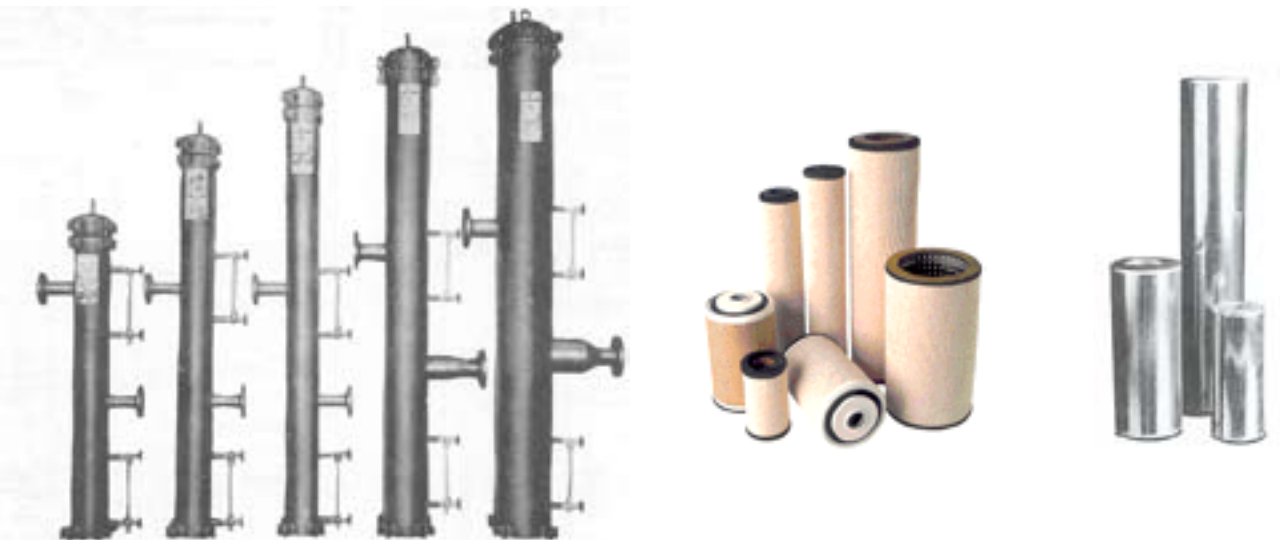


FOX FILTRATION

Specifications and Performance

NG-Micropleat COALESCING FILTER ELEMENTS

SIZE	STANDARD TECHNOLOGY	NG-Micropleat TECHNOLOGY
4.5 OD X 3.0 ID X 24"L	FXFG324	FXPL03FG3240
4.5 OD X 3.0 ID X 36"L	FXFG336	FXPL03FG3360
4.5 OD X 3.0 ID X 72"L	FXFG372	FXPL03FG3360 (2)
5.5 OD X 4.2 ID X 24"L	FXFG524	FXPL03FG5240
5.5 OD X 4.2 ID X 36"L	FXFG536	FXPL03FG5360
5.5 OD X 4.2 ID X 72"L	FXFG572	FXPL03FG5360 (2)

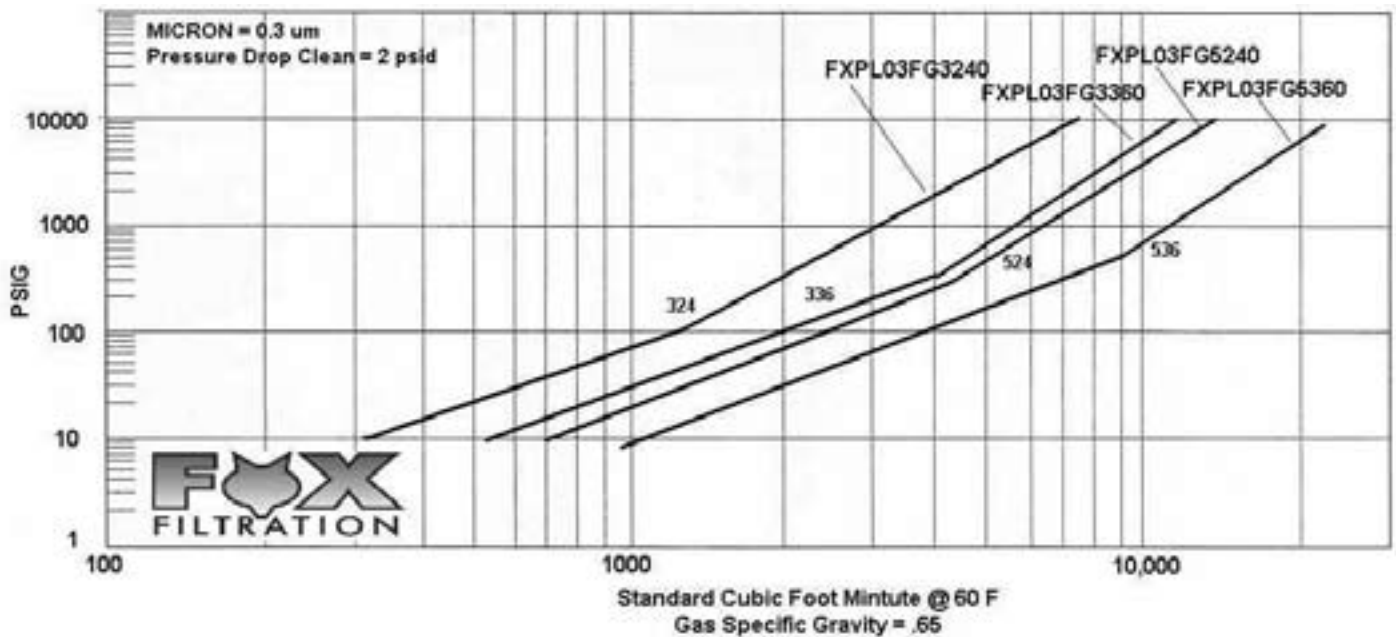

For information on the full line of Fox Filtration products, visit our web site at www.foxfiltration.com or contact your authorized Fox Filtration distributor.

Distributed by: